




High Temperature BEARINGS CO., LTD

30 mm x 62 mm x 16 mm NTN 6206ZZ deep groove ball bearings

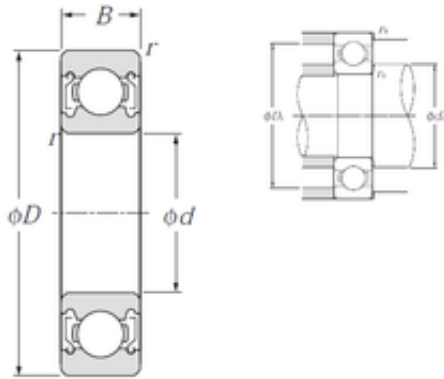

6206ZZ Bearing 2D drawings and 3D CAD models

Bearing No. 6206ZZ

Size	30x62x16 mm
Bore Diameter	30 mm
Outer Diameter	62 mm
Width	16 mm
d	30 mm
D	62 mm
B	16 mm
C	16 mm
rn	0,5 mm
r min.	1 mm
da min.	35 mm
da max	39 mm
Da max.	57 mm
ra max.	1 mm
Weight	0,199 Kg
Basic dynamic load rating (C)	19,5 kN
Basic static load rating (C0)	11,3 kN
(Grease) Lubrication Speed	11 000 r/min
Category	Ball Bearings
Inventory	191.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	0.204
EAN	4547359004649
Product Group	B00308



High Temperature BEARINGS CO., LTD

Enclosure	2 Metal Shields
Precision Class	ABEC 1 ISO P0
Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	No
Cage Material	Steel
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	30MM Bore; 62MM Outside Diameter; 16MM Outer Race Width; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Stee
Other Features	Deep Groove Shell Alvania Prelubricated
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	http://www.ntnamerica.com
Weight / LBS	0.439
Outside Diameter	2.441 Inch 62 Millimeter
Outer Race Width	0.63 Inch 16 Millimeter
Bore	1.181 Inch 30 Millimeter
Inner Race Width	0 Inch 0 Millimeter
bore diameter:	30 mm
precision rating:	ISO Class 0
outside diameter:	62 mm



High Temperature BEARINGS CO., LTD

finish/coating:	Uncoated
overall width:	16 mm
bearing material:	High Carbon Chrome Steel
bore type:	Round
cage material:	Steel
closure type:	Double Shielded
inner ring width:	16 mm
row type & fill slot:	Single Row Non-Fill Slot
outer ring width:	16 mm
snap ring included:	Without Snap Ring
maximum rpm (grease):	11000 rpm
internal clearance:	CN
fillet radius:	1 mm
operating temperature range:	-40 to 120 ° C
maximum rpm:	13000 RPM
dynamic load capacity:	19500 N
series:	62
static load capacity:	11300 N
manufacturer product page:	Click here